# 没是以过过 过声 经过没过至了


NO. 35 - 13

OF SECTIONS 11 & 12 TOGETHER WITH PORTIONS OF SECTIONS 1, 10, 15 AND THE MT. DIABLO BASELINE IN T. 1 S., R. 29 E., M.D.M., IN THE UNINCORPORATED TERRITORY OF THE COUNTY OF MONO, STATE OF CALIFORNIA.

## SURVEYOR'S STATEMENT

THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE REQUIREMENTS OF THE LAND SURVEYORS' ACT AT THE REQUEST OF THE FOREST SUPERVISOR, INYO NATIONAL FOREST, U.S. DEPARTMENT OF AGRICULTURE, IN OCTOBER - DECEMBER, 1994.

JEFFREY A. THOMPSON, L.S. 7002 LICENSE EXPIRES 9-30-97



#### LEGEND

- (R1) U.S. GENERAL LAND OFFICE NOTES, A. W. VON SCHMIDT, 1855. (R2) U.S. GENERAL LAND OFFICE NOTES, S. A. HANSON, 1879.
- (R3) U.S. GENERAL LAND OFFICE NOTES, G. F. SAWYER, 1923.

OFFICE MONUMENT, AS NOTED.

- SET, 30" x 2.5" DIA. ALUMINUM POST WITH 3.25" ALUMINUM CAP, STAMPED "U.S. DEPT. OF AGRICULTURE FOREST SERVICE." AND MARKED AS SHOWN. O FD. 1923 U. S. GENERAL LAND
- HIGHWAYS BRASS CAP, BRAZED TO 2.5" O.D.G.I.P., MARKED AS


♦ FD. CALIFORNIA DIVISION OF

- ▲ FD. BASIC HORIZONTAL CONTROL MONUMENT. AS NOTED.
- FD. OTHER EVIDENCE, AS NOTED.
- O CALCULATED POSITION, NOTHING SET.
- FD. BEARING TREES, AS NOTED.
- CORNERS SEARCHED FOR, NOT FOUND.

ADOBE

1956

37° 54° 47.26° 118" 41" 20.28"

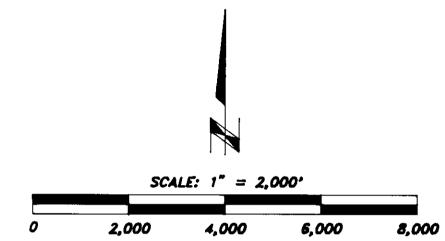

SET IN 1' SQ. BY 0.1'

AS SHOWN.

CONCRETE PAD, MARKED

COUNTY SURVEYOR'S STATEMENT

THIS MAP HAS BEEN EXAMINED IN ACCORDANCE WITH SECTION 8766 OF THE LAND SURVEYOR'S ACT THIS 15TH DAY OF MALCH , 1995.

Barre Bageonia RICHARD BOARDMAN, L.S. 4686 LICENSE EXPIRES 9-30-95



### RECORDER'S STATEMENT

FILED THIS 13 th DAY OF March , 1995, AT 3:33 P.M. IN BOOK 3 OF RECORD OF SURVEY MAPS AT PAGES 25 thm 25 F, AT THE REQUEST OF THE INYO NATIONAL FOREST.

#1012 INSTRUMENT NO.: THE 10/12 RENN NOLAN MONO COUNTY RECORDER DEPUTY COUNTY RECORDER

BASIS OF BEARINGS

THE BEARINGS SHOWN ON THIS MAP ARE BASED ON THE PUBLISHED CALIFORNIA COORDINATE SYSTEM 1983 VALUES OF STATIONS ADOBE 1956 AND MIX CADH AND THEIR RESPECTIVE AZIMUTH MARKS. THE GRID BEARINGS HAVE BEEN ROTATED BY + 1. 04. 42" WHICH IS THE AVERAGE VALUE FOR THIS PROJECT. DISTANCES SHOWN ARE GROUND DISTANCES.

37" 55" 15.43" 118' 42' 15.62" ADOBE FD. 3.5" DIA. U.S.C. & G.S. **>--->** 1956 BRASS CAP, FIRMLY SET, ASS OF STAPINGS FLUSH, ON TOP OF **BOULDER.** FD. 3.5" CALIF. DIV. OF HWYS. BRASS CAP, FD. 3.5" DIA. U.S.C. & G.S. MARKED AS SHOWN. TRIANGULATION BRASS CAP.

37" 54" 40.86"

118" 43' 11.86"

AZ. MK.

1972 118 44' 05.32" FD. 3.5" CALIF. DIV. OF HWYS. BRASS CAP, MARKED AS SHOWN. FIRMLY SET, FLUSH, IN BOULDER. FD. U.S.G.L.O. 1923 FD. U.S.G.L.O. TWNSP. CORNER. 1923 STD. 1/4

FLUSH, IN ROCK.

37' 54' 19.48"

MIX


1972

CORNER. FD. CALIF. DIV. OF HWYS. BRASS CAP FOR STD. CORNER SECTIONS 31 & 32

FD. SQUARE CUT STONE, 1.2' × 1.2' × 0.6', BESIDE DECAYED POST, 4" DIA. × 3', WITH AXE CUT END, IN N-S FENCELINE. FD. 2" DIA. x 7' POST WITH ROTTED END NEARBY. ACCEPTED AS A PROPORTIONATE RESTORATION OF THIS CORNER, BASED ON THE SECTION CORNER TO THE SOUTH AND THE POSITION OF THE CLOSING CORNER TO THE NORTH. THIS STONE CLEARLY PREDATES THE 1923 G.L.O. SURVEY.

3.

FD. SCRIBED STAKE, MOUND OF STONES & THREE BT'S.

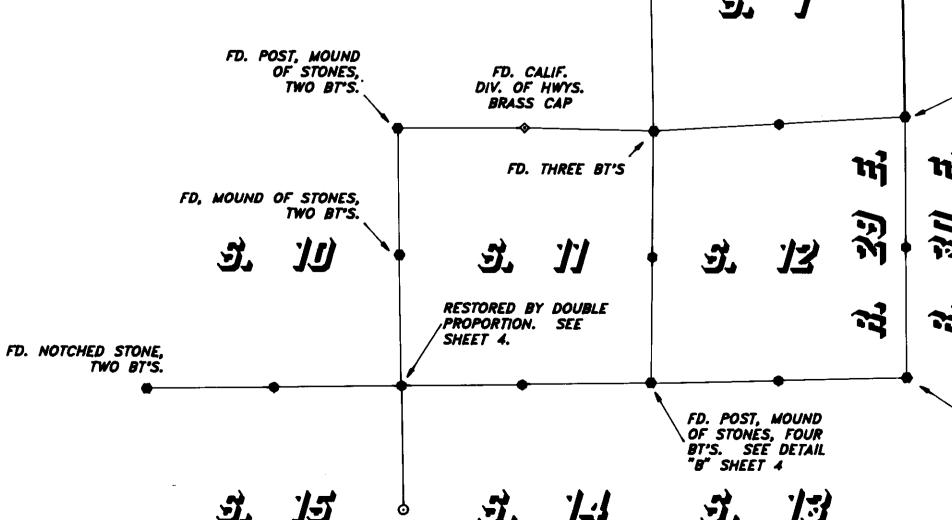

FD. BT FOR SECTION 14

FD. FOUR BT'S FROM 1879 C.C.,

U.S.G.L.O. 1923 C.C. & STD. CORNERS & EVIDENCE OF

OF MT. DIABLO BASELINE.

ERRORS IN 1923 RETRACEMENT